



S+S REGELTECHNIK





S+S REGELTECHNIK

THERMASGARD® RPTF 2



Pendulum room temperature sensors
with passive output





Resistance thermometer **THERMASGARD® RPTF 2** with passive output is specifically used for temperature detection in larger rooms and halls, as dark radiation sensor for example. The pendulum room sensor RPTF-2 (globe thermometer) determines the effective portion of active radiation or also the effective radiant heat at the measured location. Due to the measuring method employed by this pendulum room temperature sensor in combination with its positioning in the room, an excellent and room-representative measuring result is achieved. The globe temperature is determined to take heat radiation into consideration and to estimate the degree of thermal comfort (operative room temperature).

The operative room temperature describes the coaction of heat radiation and heat convection (the ratio of globe temperature / air temperature is approx. 70% / 30%).

TECHNICAL DATA

Measuring range:	-5...+60 °C
Sensors / output:	see table, passive (optional also with two sensors)
Connection type:	2-wire connection (4-wire connection optional)
Testing current:	approx. 1 mA
Globe:	plastic, colour black, $\varnothing = 50 \text{ mm}$
Sensor cable:	PVC; 1.5 m, H03VV-F, $2 \times 0.25 \text{ mm}^2$, ends stripped with wire end sleeves (other lengths optional: 3 m, 6 m)
Insulating resistance:	$\geq 100 \text{ M}\Omega$, at +20 °C (500 V DC)
Humidity:	< 95 % r. H.
Protection class:	III (according to EN 60 730)
Protection type:	IP 65 (according to EN 60 529)

Dimensional drawing

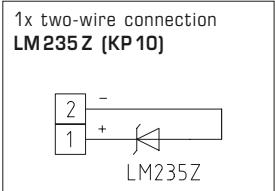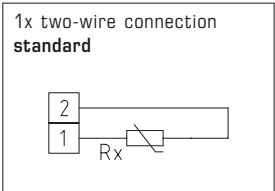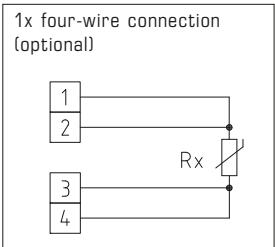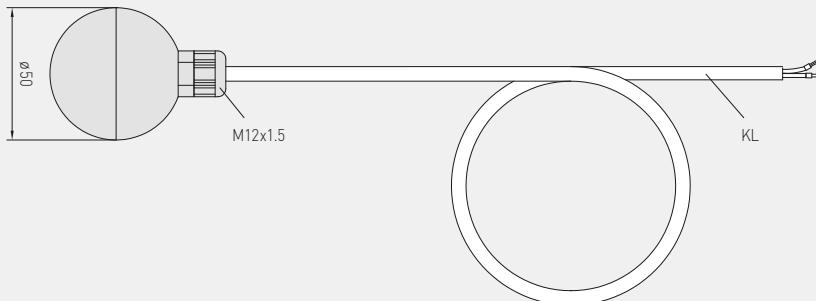

THERMASGARD® RPTF 2 – Pendulum room temperature sensors (with globe)

Type / WG03	Sensor / Output	Item No.	Price
RPTF 2		IP 65	
RPTF2 PT100	Pt100 (according to DIN EN 60 751, class B)	1101-6070-1211-010	49,62 €
RPTF2 PT1000	Pt1000 (according to DIN EN 60 751, class B)	1101-6070-5211-010	52,19 €
RPTF2 NI1000	Ni1000 (according to DIN EN 43 760, class B, TCR = 6180 ppm / K)	1101-6070-9211-010	51,32 €
RPTF2 NI1000TK5000	Ni1000 TK5000 (TCR = 5000 ppm / K), LG-Ni1000	1101-6071-0211-010	54,54 €
RPTF2 LM235Z	LM235Z (TCR = 10 mV / K; 2.73 V at 0 °C), KP10	1101-6072-1211-010	49,72 €
RPTF2 NTC1,8K	NTC 1.8 K	1101-6071-2211-010	54,34 €
RPTF2 NTC10K	NTC 10 K	1101-6071-5211-010	54,34 €
RPTF2 NTC10K PRECON	NTC 10 K Precon	1101-6071-9211-010	54,34 €
RPTF2 NTC20K	NTC 20 K	1101-6071-6211-010	54,34 €
RPTF2 NTC30K	NTC 30 K	1101-6071-7211-010	54,34 €
RPTF2 KTY81-210	KTY 81-210	1101-6072-0211-010	54,34 €
Extra charge::	2-wire connecting leads, per running meter (PVC) 4-wire connecting leads, per running meter (PVC)	on request on request	
For special orders please specify:	Type, sensor type and cable length e.g. RPTF2 Pt100, 3m; RPTF2 Pt1000, 4m; RPTF2 KTY 81-210, 6m		