

# PS11 – Ultra-Long Life OEM Pressure Switches

- ▶ 0.75 to 15 psi (52 to 1034 mbar)
- ▶ Factory Set or Adjustable Set Points

For low pressure applications, the longevity of our PS11 Series is hard to beat. Their snap-action microswitch resets automatically and meets or exceeds industry standards. The brass housing offers chemical resistance at an affordable price.

## Specifications

<b>Switch*</b>	5 Amp @ 24 VDC and 250 VAC 1.0 Amp resistive 0.5 Amp inductive @ 24 VDC (-G option)
<b>Repeatability</b>	See Table 1
<b>Wetted Parts</b>	
<b>Diaphragm</b>	Nitrile (optional Viton®, EPDM or Kapton®)
<b>Fitting</b>	Brass
<b>Housing</b>	Brass
<b>O-Ring</b>	Nitrile (optional Viton® or EPDM)
<b>Ingress Protection**</b>	DIN 43650A IP00; Terminals IP00; Flying Leads IP00
<b>Proof Pressure</b>	0 psia to 150 psi (-1 bar to 10.3 bar)
<b>Burst Pressure</b>	300 psi (20.7 bar)
<b>Approvals</b>	CE, UL Approved units available
<b>Weight, Approximate</b>	0.31 lbs. (0.14 kg)

\* Gold contacts (option G) may be required for less than 12 VDC and 20 mA.  
\*\* Plastic housing is vented to atmosphere. Consult factory for non-vented version, IP-rated version.


## Recommended Operating Temperature Limits

Diaphragm Material	Range
Nitrile	15°F to 250°F (-9°C to +121°C)
Viton®	0°F to 250°F (-18°C to +121°C)
EPDM	-20°F to +250°F (-29°C to +121°C)
Kapton®	-40°F to +250°F (-40°C to +121°C)

Note: Switches may function below the cold temperature limit but the set point and deadband will increase. Consult factory for details.




## Dimensions

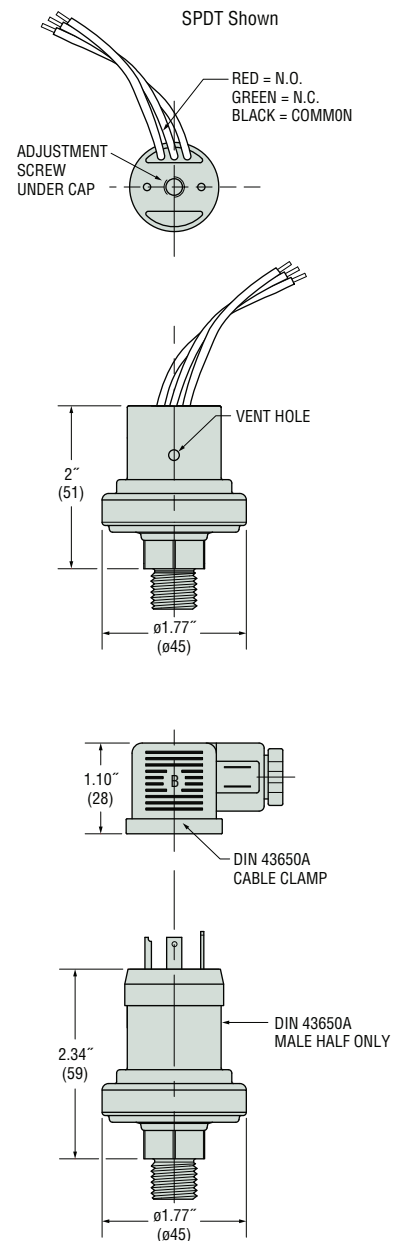

## How To Order

Use the **Bold** characters from the chart below to construct a product code. Please reference Notes.

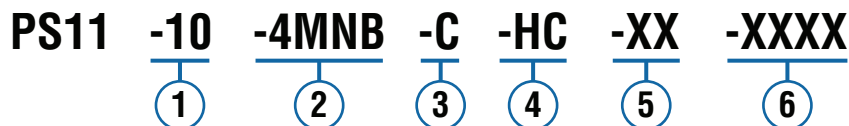

**1 Pressure Range Code**

Insert Pressure Range Code from Table 1, below.

**2 Pressure Fitting<sup>1</sup>**

- 2MNB = 1/8" NPTM Brass
- 4MNB = 1/4" NPTM Brass
- 4MGB = 1/4" BSPM Brass (G type)
- 4MSB = 7/16"-20 SAE Male, Brass

**3 Circuit**

- A = SPST/N.O.
- B = SPST/N.C.
- C = SPDT

**4 Electrical Termination<sup>2</sup>**

- FLXX = Flying Leads<sup>3</sup>
- ELXX = 1/2" Male NPT Conduit w/Flying Leads<sup>3</sup>
- H = DIN 43650A Male Half Only
- HC = DIN 43650A 9mm Cable Clamp
- HN = DIN 43650A 1/2" NPT Female Conduit

**5 Options**

- V = Viton<sup>®</sup> Diaphragm
- E = EPDM Diaphragm
- K = Kapton<sup>®</sup> Diaphragm
- G = Gold Contacts  
(for loads less than 12 mA @ 12 VDC)
- OF = Oil Free Cleaned
- WF = Weather Pack Connector, Female
- WM = Weather Pack Connector, Male
- DE = Deutsch Connector, Male, DT04 Series

**6 Fixed Set Point (optional)**

- A. Specify set point -FS (in PSI or mBAR, see example)<sup>4</sup>
  - B. Set Point Actuation
    - R on Rising Pressure
    - F on Falling Pressure
- Example: -FS200MBARF for 200 mBAR Falling  
or -FS3PSIR for 3 PSI Rising

Notes:

1. Other fittings available. Consult factory.
2. DIN units are available with -C SPDT circuit only.
3. 18" is standard. Specify lead length in inches (max. 48"). e.g. -FL18 or -EL30.
4. Set Point must be within Pressure Range selected in Step 1.

Table 1 — Pressure Range Codes

Pressure Range Code	Pressure Range	Accuracy*	Average Deadband**
<b>10</b>	0.75-4 psig (51-276 mbar)	±0.15 psi (10 mbar) +4% of setting	0.2 psi (14 mbar) +9% of setting
<b>20</b>	3.5-15 psig (241-1034 mbar)	±0.25 psi (17 mbar) +5% of setting	0.4 psig (26 mbar) +11% of setting

\* Accuracy and set point of units may change due to the effects of temperature.

\*\* In certain applications deadband can be tailored and controlled to customer specifications. Consult factory for details.