

LED-Signal light AL2

Comax
Signaltechnik

General information

Multi functional LED-Signal with 5 colours and 3 signals: steady light, flash light and strobe light, all in one module, selection of signal with DIP-switch.

Extreme long life time, very low current consumption.


An alternative solution to common signal towers!

Suitable for many applications, e.g. security, industrial automation and machine construction.



Technical Data

Body	Plastic, grey
Lens	Polycarbonat, clear
Cable entry	M16x1,5 for wires 6-8mm
Operation	continuous
Degree of protection	IP54 according to EN 60529
Installation	wall mounting
Temperature	-25°C up to +60°C
Weight	approx. 0.3 kg

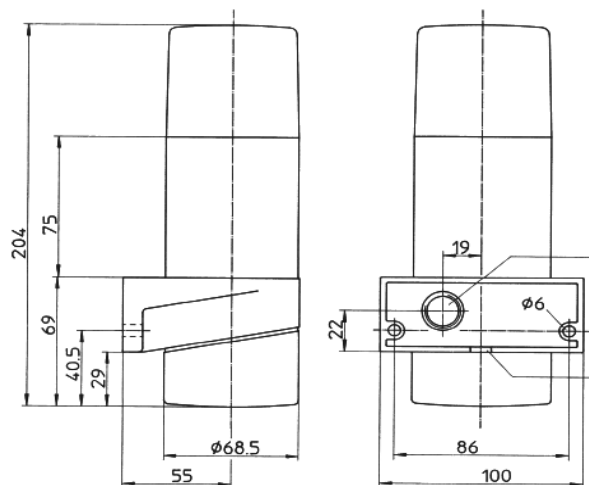

Order data

No. of article	Nominal tension	Current consumption	Strobe	Flash
AL2.024.2	24 VDC	180mA	50ms on, 450ms off	200ms on, 300ms off
AL2.230.1	90-265 VAC	90mA	50ms on, 450ms off	200ms on, 300ms off

Technical data may be changed without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_AL2_REV0_01_02_2013