

Xenon strobe light BLE15


Comax
Signaltechnik

General information

Robust optical signal for inside or outside use. For continuous operation. IP66

Technical data

Case	PC, steel angle bracket
Lens	PC
-colour	red, amber, green, blue, clear
Cable gland	M20
Degree of protection	IP66 according to EN 60529
Flash power output	15J
Flash frequency	1 Hz
Installation	free
Temperature range	-40°C up to +50°C
Weight	about 1.0 kg
Operation	Continuous operation as per IEC34; DIN EN 60034-1; VDE 0530 Level S1

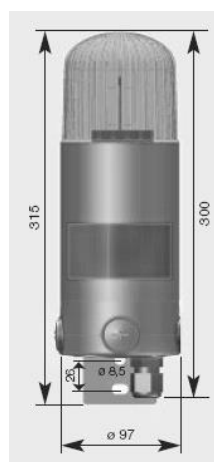

Order data

No. of article	Nominal tension	Output	Current	Flash frequency
BLE15.024.2*	24 VDC	15 Joule	0.55A	about 60 flashes/min.
BLE15.230.7*	230 VAC 50-60Hz	15 Joule	0.15A	about 60 flashes/min.

*Lens colours 1 = red, 2 = amber, 4 = green, 5 = blue, 7 = clear

Without prior notification of technical modifications



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_BLE_REV0_25_01_2013