

# Revolving flash light DLH

**Comax**  
Signaltechnik


## General information

Universal revolving flash light with modern design. Powerful halogen bulb. Long life drive. System of protection IP65. Shock resistance 20 joules.



## Technical data

Case	ABS/PC, black, shock resistant
Dome	polycarbonate, shock resistant
-colour	red or yellow, other colours on request
Drive	wheel and disk drive, motor in gravity centre
-operating life	approx. 5000 hours
-reflector speed	180 RPM
Fixing	flat-, angle- or tube mounting
Connection	threaded terminal end
Duty cycle	continuous operation
System of protection	IP65 according to EN6529
Mounting direction	unlimited
Temperature range	-30°C to +50°C
Weight	approx. 0.670 kg

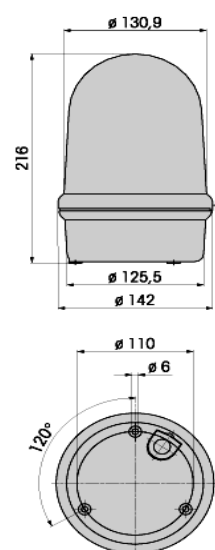

## Order data

Item number	Rated voltage	Output	Current consumption
DLH.012.2*	12 VDC	35 W Halogen	3.0 A
DLH.024.3*	24 VAC/VDC	35 W Halogen	1.60 A
DLH.115.3*	115 VAC/VDC	35 W Halogen	0.35 A
DLH.230.1*	230 VAC	35 W Halogen	0.17 A

**Colours** 1 = red, 3 = yellow, 4 = green, 5 = blue, 7 = clear

## Spare part

M-DLH.000.01 Mounting angle

Subject to change without prior notice



**Comax**  
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz  
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: [mail@comax.ch](mailto:mail@comax.ch) internet: [www.comax.ch](http://www.comax.ch)