

Panel mount LED-status light DV

Comax
Signaltechnik

General information


Panel mount status light in LED technology. For holes with diameter 22mm. High degree of protection IP65.

For applications on control boards or in the machine industry.



Technical data

Dimensions	Ø 29mm x 51,5mm
Case	PC
-colour	black
Lens	PC
-colour	red, amber, green, blue, clear
Temperature range	-25°C up to +50°C
Operation	continuous
Installation	panel mount, holes Ø 22mm
Degree of protection	IP65 according to EN60529
LED	Red: 12 Chips Super-Bright Amber: 12 Chips Super-Bright Green: 1 Chip InGan Ultra Super-Bright Blue: 2 Chips InGan Ultra Super-Bright Clear: 1 Chip InGan Ultra Super-Bright
Life cycle	50'000 hours
Weight	90g

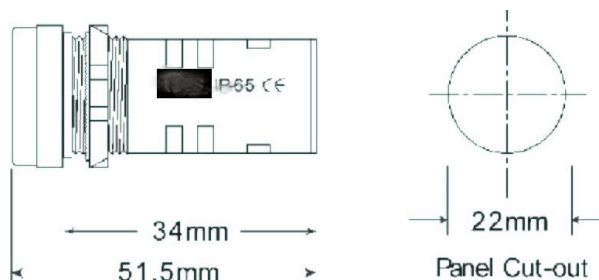

Order data

No. of article	Nominal tension	Current
DV.012.3*	12VAC/VDC	20-80mA
DV.024.3*	24VAC/VDC	20-80mA
DV.048.3*	48VAC/VDC	20-80mA
DV.115.3*	110-130VAC/VDC	18-25mA
DV.230.1*	230VAC	18-25mA

Lens colours 1 = red, 2 = amber, 4 = green, 5 = blue, 7 = clear

Options Label holder 25x18mm, 25x10mm

Modification of technical data without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch