

Electronic chime G100

Comax
Signaltechnik

General information

Electronic chime for indoor use, e.g. in schools, theatres, movie theatres or other public buildings and also hotels.


Activation of chime through potential free trigger (e.g. connection of a central clock system) or directly with supply. In this case the chime will work as long as supplied.

Large nominal tension range. Automatic synchronisation of several chimes.



Technical Data

Case	ABS, white
Dimensions	(HxLxD) 195x150x70mm
Installation	screws 3,5 x 25 mm
Loudspeaker	max. 8W/8Ω
Sound output	can be controlled
Control	directly or through trigger
Connection	spring connectors up to 2.5 mm ²
Weight	ca. 0.32 kg

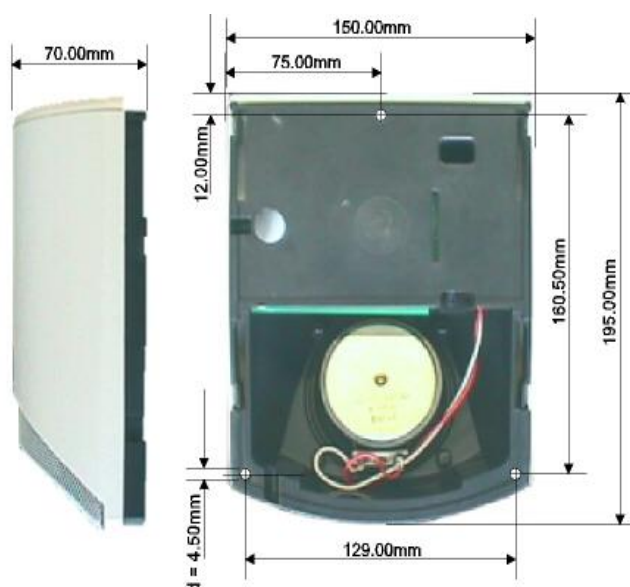

Ordering data

No. of article	Nom. tension	Sound output	Current
G100.024.3	20-48VAC/DC	ca. 90dB/A1m	500mA at 24V
G100.230.1	230VAC	ca. 90dB/A1m	50mA

Option: Electronic chime G110 for outdoor use, electronics and separate loudspeaker

Technical modifications without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_G100_REV2_08_04_2014