

Signal hooter HGT 1 + 2


Comax
Signaltechnik

General information

Heavy duty alarm for outdoor or indoor use. Aluminium die-cast body, also suitable for marine environments.

Technical data

Horn	aluminium die casting, dark grey
Cap	aluminium die casting, light grey
System of protection	IP65 according to EN 60529
Temperature range	-20°C to +60°C
Duty cycle	continuous operation
Cable:	
-gland	M20 x 1,5
-connection	conductor up to 1,5mm ²
Weight	approx. 2,7 kg

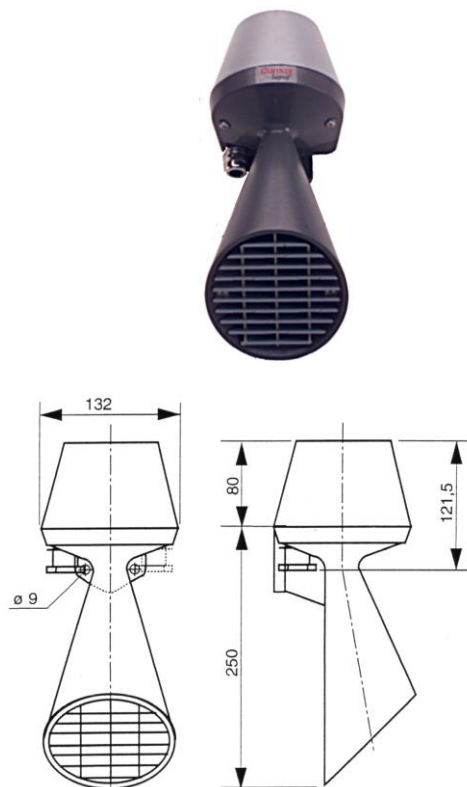

Order data

Item number	Rated voltage	Sound intensity level	Current consumption	Type
HGT1.006.1	6 VAC	approx 105-110 dB(A), 1m	3.40 A	
HGT1.012.1	12 VAC	approx 105-110 dB(A), 1m	1.20 A	
HGT1.024.1	24 VAC	approx 105-110 dB(A), 1m	0.65 A	
HGT1.042.1	42-48 VAC 50Hz	approx 105-110 dB(A), 1m	0.30 A	
HGT1.060.1	60 VAC	approx 105-110 dB(A), 1m	0.25 A	
HGT1.115.1	115 VAC	approx 105-110 dB(A), 1m	0.15 A	
HGT1.120.4	120 VAC 60Hz	approx 105-110 dB(A), 1m	0.15 A	
HGT1.230.1	230 VAC	approx 105-110 dB(A), 1m	0.07 A	
HGT1.240.4	240 VAC 60Hz	approx 105-110 dB(A), 1m	0.07 A	
HGT2.006.2	6 VDC	approx 105-110 dB(A), 1m	1.00 A	
HGT2.012.2	12 VDC	approx 105-110 dB(A), 1m	0.60 A	
HGT2.024.2	24 VDC	approx 105-110 dB(A), 1m	0.30 A	
HGT2.048.2	48 VDC	approx 105-110 dB(A), 1m	0.24 A	
HGT2.060.2	60 VDC	approx 105-110 dB(A), 1m	0.15 A	
HGT2.115.2	115 VDC	approx 105-110 dB(A), 1m	0.08 A	
HGT2.230.2	230 VDC	approx 105-110 dB(A), 1m	0.05 A	

Special models upon request

Subject to change without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_HGT1_2_REV1_04_04_2014