

Small hooter KHP 3+4


General information

A small, rugged acoustic alarm for indoor installation.
Effective wherever loud and clear signals are required.



Technical data

Case	ABS, shock-resistant
Colour	light grey
System of protection	IP32 according to EN 60529
Temperature range	-15°C to +50°C
Duty cycle	continuous operation
Cable:	
-gland	Ø 12 mm
-lead	surface or flush mounting
-connection	conductor up to 1,5 mm ²
Weight	approx. 0.18 kg

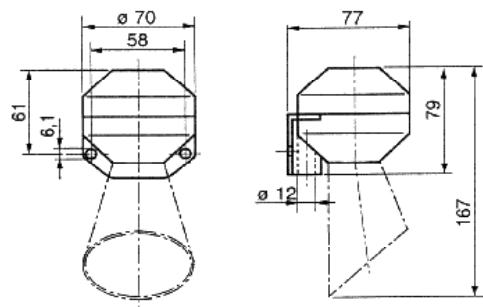

Order data

Item number	Rated voltage	Sound intensity level	Current consumption	Type
KHP3.012.1	12 VAC	approx. 92 dB(A), 1m	330 mA	without flare
KHP3.024.1	24 VAC	approx. 92 dB(A), 1m	190 mA	without flare
KHP3.042.1	42-48 VAC	approx. 92 dB(A), 1m	75 mA	without flare
KHP3.115.1	115 VAC	approx. 92 dB(A), 1m	15 mA	without flare
KHP3.230.1	230 VAC	approx. 92 dB(A), 1m	15 mA	without flare
KHP4.006.2	6 VDC	approx. 92 dB(A), 1m	100 mA	without flare
KHP4.012.2	12 VDC	approx. 92 dB(A), 1m	150 mA	without flare
KHP4.024.2	24 VDC	approx. 92 dB(A), 1m	70 mA	without flare
KHP4.048.2	48 VDC	approx. 92 dB(A), 1m	30 mA	without flare
KHP4.115.2	115 VDC	approx. 92 dB(A), 1m	30 mA	without flare

Subject to change without prior notice

