

Small hooter KHU 3+4


General information

Small, rugged hooter for universal use, flush mounting with cover.



Technical data

Case	flush box ABS, front panel Duroplast
Colour	front panel white
System of protection	according to installation
Temperature range	0°C to +50°C
Duty cycle	continuous operation
Cabel:	
-gland	Ø 12 mm
-lead	flush mounted
-connection	conductor up to 1,5 mm ²
Weight	approx. 0.16 kg

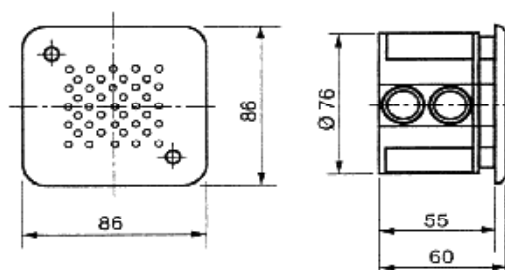

Order data

Item number	Rated voltage	Sound intensity level	Current consumption	Type
KHU3.012.1	12 VAC	approx. 92 dB(A), 1m	330 mA	flush mounted
KHU3.024.1	24 VAC	approx. 92 dB(A), 1m	190 mA	flush mounted
KHU3.042.1	42-48 VAC	approx. 92 dB(A), 1m	75 mA	flush mounted
KHU3.115.1	115 VAC	approx. 92 dB(A), 1m	15 mA	flush mounted
KHU3.230.1	230 VAC	approx. 92 dB(A), 1m	15 mA	flush mounted
KHU4.006.2	6 VDC	approx. 92 dB(A), 1m	100 mA	flush mounted
KHU4.012.2	12 VDC	approx. 92 dB(A), 1m	150 mA	flush mounted
KHU4.024.2	24 VDC	approx. 92 dB(A), 1m	70 mA	flush mounted
KHU4.048.2	48 VDC	approx. 92 dB(A), 1m	50 mA	flush mounted
KHU4.115.2	115 VDC	approx. 92 dB(A), 1m	30 mA	flush mounted

Subject to change without prior notice

