

# Small Siren KS

**Comax**  
Signaltechnik


## General information

Small but powerful audible signal for all kind of purposes, e.g. as signal for break in workshops



## Technical data

Casing	ABS
-colour	grey
Protection	Casing: IP44 according to EN 60529 Siren: IP20 according to EN 60529
Temperature range	-20°C up to +50°C
Operation	cont. operation at 12/24VDC short time operation at 230VAC
Cable	
- size	M16 for Ø 6 – 10,5 mm
- entry	flush or apparent mounting
Mounting	indoors free outdoors with siren on bottom
Weight	approx. 0.450 kg

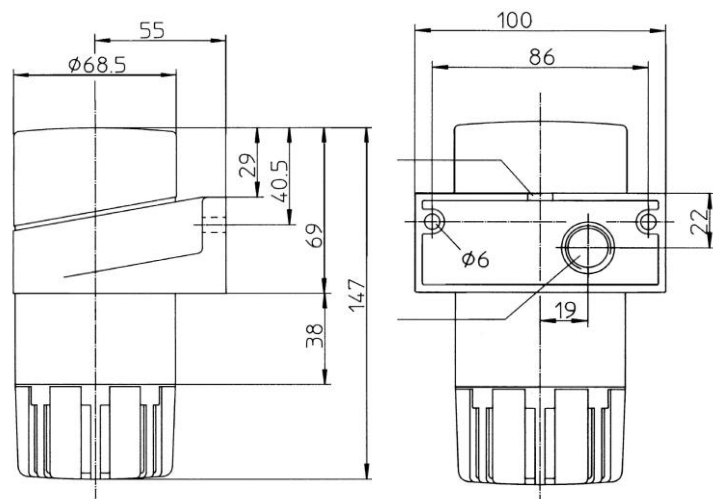

## Ordering data

Number of article	Nominal tension	Output	Current
KS2.024.2	24 VDC	approx. 100 dB(A), 1m	0.50A
KS1.230.1	230 VAC, 50 Hz	approx. 100 dB(A), 1m	0.35A

Technical data may be changed without prior notice



**Comax**  
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz  
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: [mail@comax.ch](mailto:mail@comax.ch) internet: [www.comax.ch](http://www.comax.ch)

E\_KS\_REV0\_18\_02\_2013