


Lift alarm LAX

General information

Compact alarm for elevators. Large range of nominal tension. Low current consumption. Control of sound output. IP68.

Technical data

Case	ABS, shock resistant
Colour	gray
Buzzer	Noryl N-190 (UL94-VO)
Degree of protection	IP68 according to EN 60529
Temperature range	-20°C up to +65°C
Relative humidity	95% at 40°C
Tone	Intermittent tone at 2900Hz (+/- 250Hz)
Operation	continuous
Supply:	
-cable entry	hole for cable up to Ø 12 mm
-installation	surface or flush
-lead	faston 6,3mm
Weight	ca. 0.18 kg

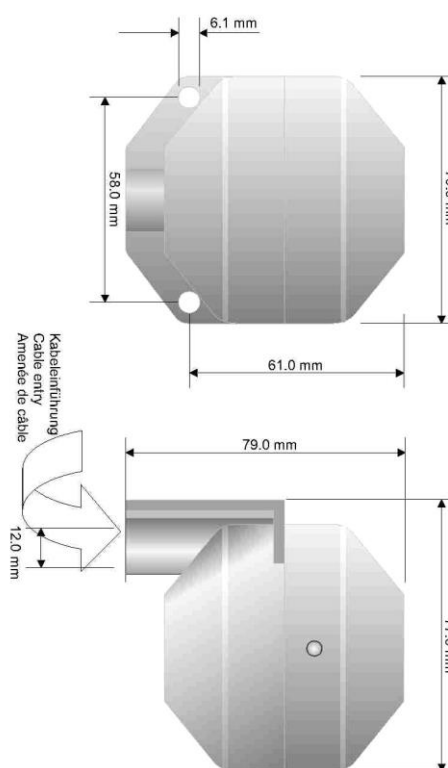

Order data

No. of article	Nominal tension	Sound output	Current
LAX.012.2	5-15VDC	ca. 92dB(A) 60cm at 5V ca. 103dB(A) 60cm at 15V	10mA at 5V 50mA at 15V

Modification of technical specifications without prior notice

