

Mini-Strobe light MS

General information

Mini-Strobe light with intense xenon flash! Delivery in two parts: drive unit and lamp unit. Consequently, lamp and drive unit can be mounted separately!


High degree of protection IP67!

For multiple applications, e.g. security or building control



Technical data

Base	Synthetic rubber, white
Lens	Acryl
-colour	red, amber, blue, green clear
Degree of protection	IP67 according to EN 60529
Connection	cabl
Operation	continuous
Installation	free
Temperature	-20°C up to +50°C
Weight	Approx. 0,065kg
Dimensions	Drive unit: 62x33x22mm Lamp unit: 79x31x21mm

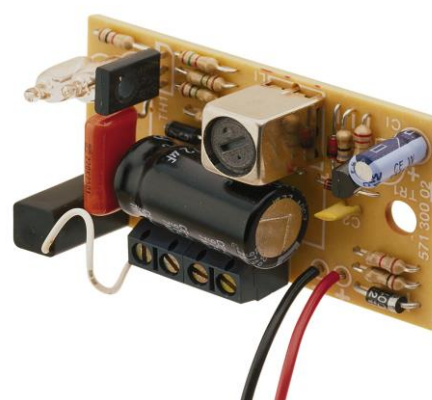

Order data

No. of article	Nominal tension	Power output	Current consumption	Flash frequency
MS1.012.2*	12VDC	1 Joule	115mA	approx. 60flashes/min.
MS1.024.2*	24VDC	1 Joule	55mA	approx. 60flashes/min.

*lens colours 1 = red, 2 = amber, 4 = green, 5 = blue, 7 = clear

Technical data may be changed without prior notice

