

LED-Signal light SAL

General information



Powerful LED-signal light, flexible installation on movable steel bracket, powder coated, can be combined as double or triple signal light with red, yellow or green lens.

Two redundant switching circuits. Operating time up to 50'000 hours.



Technical data

Case	ABS
-colour	grey
Lens	Ø 120mm
-colour	red, yellow, green
LED	24/25 LED
Temperature range	-30°C – +70°C
Operation	continuous
Installation	with bracket of steel
Cable entry	M20
Degree of protection	IP65 according to EN6529
Class of protection	II
Wight	1,0kg

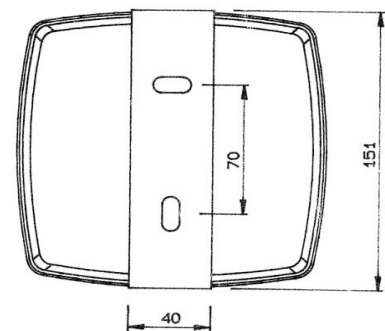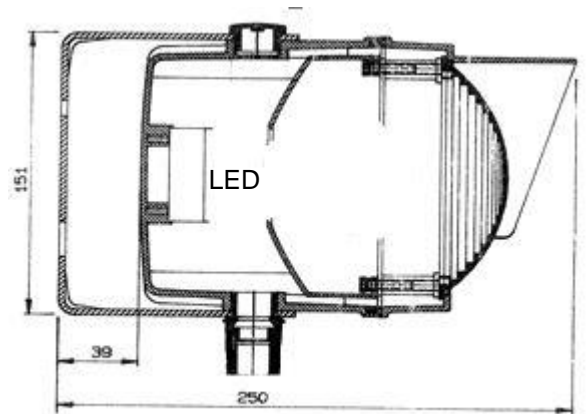

Order data

Item number	Colour of lens + LED	Tension	Current
SAL.024.31	red	24V AC/DC	100mA
SAL.024.33	yellow	24V AC/DC	100mA
SAL.024.34	green	24V AC/DC	200mA
SAL.230.11	red	230VAC	50mA
SAL.230.13	yellow	230VAC	50mA
SAL.230.14	green	230VAC	90mA

Accessories

V-SA.000.00 Connecting piece (for double and triple signal lamp)

Subject to changes without prior notice

