



LED Strobe SOC



- Ceiling mounting
- Minimum height 3m (x)
- Coverage 7,5m/3m (y)
- Frequency 1Hz/0,5Hz
- min. current 10mA
- **EN54-23 Code C-3-7.5**

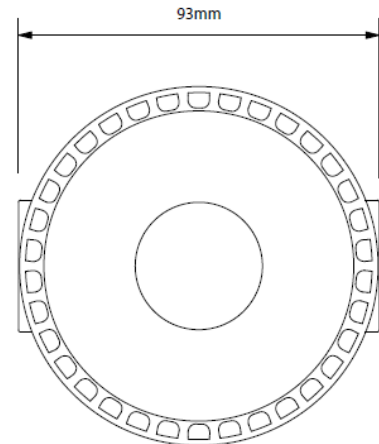

Technical data	
LED-Strobe	
Colours	red or white
Frequencies	1Hz or 0,5Hz (switchable)
Monitoring	reverse polarity
EN54-23	
Mounting	Ceiling
Coverage (y)	7,5m or 3m (switchable)
Mounting height (x)	min. 3 m
Coverage volume	132m ³ (21m ³)
Case	
Material	ABS
-colours	red or white
Degree of protection	IP33C (IP65 with Backbox)
Temperature range	-25°C up to +70 °C
Weight	100g
Approval	EN 54-23

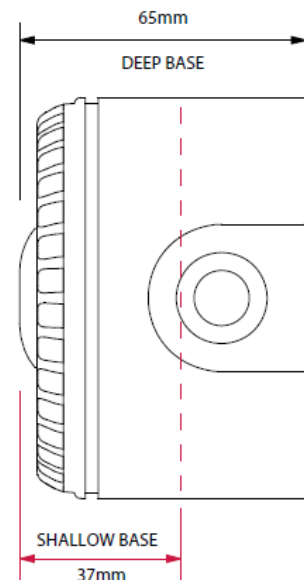

Order data			
No. of article	Tension	Frequency	Current
SOC.024.2 ^{1 2}	9-60VDC	1 Hz/0,5Hz	10-25mA

² LED colours	1 = red ,6 = white
¹ case colours	1 = red, 6 = white

Accessories	
A-SO.000.0 ¹	Backbox with 2 diagonal entries
U-SO.000.0 ¹	Backbox with 2 entries on the same side

Technical modifications without prior notice

