



LED Strobe SOW



- Wall mounting
- Minimum height 2,4m (x)
- Coverage 7,5m/2.5m (y)
- Frequency 1 Hz/0,5Hz
- min. Current 10mA
- **EN54-23 Code W-2.4-7.5**

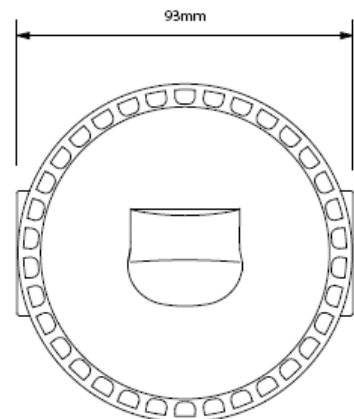

Technical data	
LED-Strobe	
Colours	red or white
Frequencies	1Hz or 0,5Hz (switchable)
EN54-3	
Mounting	Wall
Coverage (y)	7,5m or 2.5m (switchable)
Mounting height (x)	min. 2,4 m
Coverage volume	135m ³ (15m ³)
Case	
Material	ABS
-colours	red or white
Degree of protection	IP33C (IP65 with Backbox)
Temperature range	-25°C up to +70 °C
Weight	100g
Approval	EN 54-23

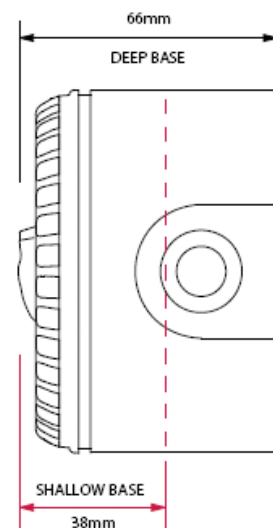

Order data				
No. of article	Tension	Frequency	Current	
SOW.024.2 ^{1 2}	9-60VDC	1 Hz/0,5Hz	10-25mA	

² LED-colours	1 = red ,6 = white
¹ case colours	1 = red, 6 = white

Accessories	
A-SO.000.0 ¹	Backbox with 2 diagonal entries
U-SO.000.0 ¹	Backbox with 2 entries on the same side

Technical modifications without prior notification

