


# Sounder with LED strobe SPW


**Comax**  
Signaltechnik



- Wall mounting
- Minimum height 2,4m (x)
- Coverage 7,5m/2,5m (y)
- Frequency 1Hz/0,5Hz
- min. current 22mA
- **EN54-23 Code W-2.4-7.5**

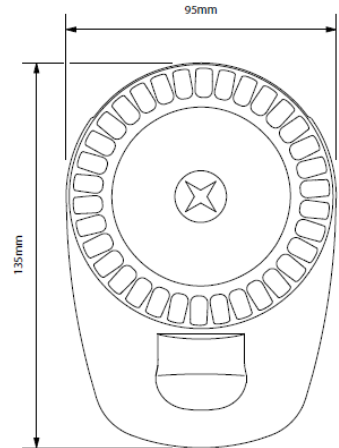

<b>Technical data</b>	
<b>LED-Strobe</b>	
Colours	red or white
Frequencies	1Hz or 0,5Hz (switchable)
<b>Sounder</b>	
Output	102dB (A) (tone 3)
Monitoring	reverse polarity
<b>EN54-23</b>	
Mounting	Wall
Coverage (y)	7,5m or 2,5m (switchable)
Mounting height (x)	min. 2,4 m
Coverage Volume	135m <sup>3</sup> or 15m <sup>3</sup>
<b>Case</b>	
Material	ABS
-colours	red or white
Degree of protection	IP65
Temperature range	-25°C up to +70 °C
Weight	200g
Approval	EN 54-23

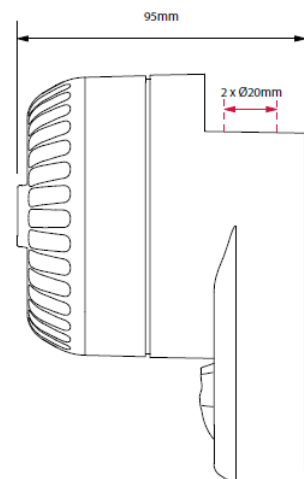

<b>Order data</b>				
Article No.	Tension	Frequency	Output	Current
SPW.012.2 <sup>1 2</sup>	9-15VDC	1 Hz/0,5Hz	102dB	22-37mA
SPW.024.2 <sup>1 2</sup>	18-28VDC	1 Hz/0,5Hz	102dB	22-37mA

<sup>2</sup> LED colours	1 = red ,6 = white
<sup>1</sup> Case colours	1 = red, 6 = white

Technical modifications without prior notice



**Comax**  
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz  
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: [mail@comax.ch](mailto:mail@comax.ch) internet: [www.comax.ch](http://www.comax.ch)