

LED-Signal light TLA4

Comax
Signaltechnik


General information

Compact and efficient LED-Signal light with a broad tension range. Modular system allows multiple combinations. 24 high power LED's. High degree of protection IP65.

For applications in the machine and process industry, in building control, for doors and gateways and in internal transport.

Technical data

Dimensions	Ø 140mm x 177mm
Case	PC
-colour	black/grey
Lens	PC
-colours	clear
LED	24 High power LED's
- colours	red, amber, yellow, green
Output	89cd (amber LED/lens)
Temperature range	-25°C up to +50°C
Construction	Bayonet with anti-tamper locking screw
Operation	continuous
Installation	Direct or with a bracket
Connection	Cable entry through bottom Ø 5-7mm or on sides 2xM20
Degree of protection	IP65 according to EN60529
Weight	410g

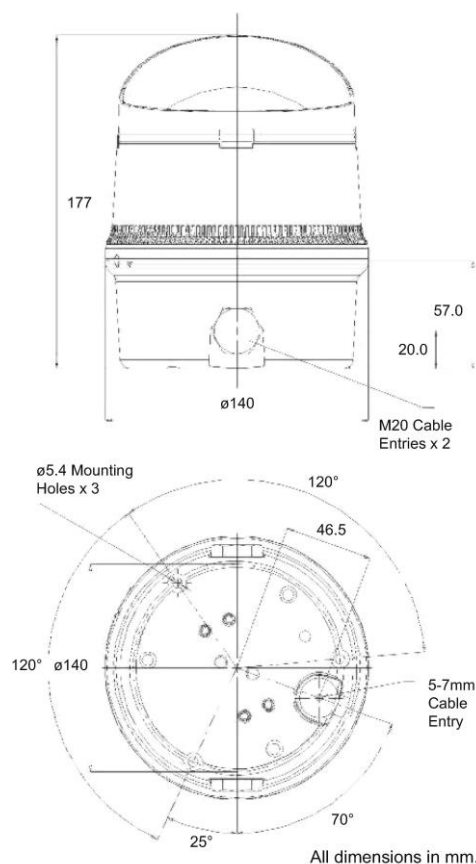

Order data

No. of article	Nominal tension	Current consumption
TLA4.024.2*	10-30VDC	175mA
TLA4.230.7*	90-230VAC 50/60Hz	15-40mA

LED colours 1 = red, 2 = amber, 3 = yellow, 4 = green

Options Wall mounting bracket, connector piece

Technical modifications without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_TLA4_REV1_07_06_2016