

# Analog Output Module Ex i / I.S. Outputs, 8 Channels for Zone 1 Series 9465



- > 8 channels for controlling I/P converters and control valves with 0/4 ... 20 mA
- > Intrinsically safe outputs Ex ia IIC
- > Galvanic separation between outputs and system
- > Open-circuit and short-circuit monitoring for each field circuit
- > Module can be replaced in operation (hot swap)
- > New version: Type 9468/32

www.stahl.de



02008E00



A4

The Analog Output Module is used for the connection of up to 8 I/P converters, positioners or control valves with 0 ... 20 mA or 4 ... 20 mA signals. All outputs are intrinsically safe and short-circuit proof.

Each output is individually monitored for open and short circuits. The interface of the Analog Output Module with the internal data bus of the BusRail is designed with redundancy. For operation of HART field devices see Series 9466.



	ATEX / IECEx						NEC 505						NEC 506						NEC 500					
	0	1	2	20	21	22	Class I						Class II						Class III					
Zone	0	1	2	20	21	22	Zone	0	1	2	20	21	22	Division	1	2	1	2	1	2				
Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x				
Installation in		x	x		x <sup>*)</sup>	x <sup>*)</sup>	Installation in		x	x		x <sup>*)</sup>	x <sup>*)</sup>	Installation in	x	x	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>				

<sup>\*)</sup> Restrictions see table explosion protection

WebCode 9465A

# Analog Output Module Ex i / I.S. Outputs, 8 Channels for Zone 1

## Series 9465



### Selection Table

Version	Description	Order number	Weight kg / lbs
Analog Output Module	8 channels for controlling I/P converters and control valves with 0/4 mA ... 20 mA	<b>9465/12-08-11</b>	0.267 / 0.589
Note	Please order terminal separately - see Accessories		

### Explosion Protection

<b>Global (IECEx)</b>	
Gas	PTB 06.0001X Ex ib [ia] IIC/IIB T4
<b>Europe (ATEX)</b>	
Gas and dust	PTB 99 ATEX 2207 ⊕ II 2 (1) G Ex ib [ia] IIC T4 ⊕ II (1) D [Ex ia] IIC
<b>Certifications and certificates</b>	
Certificates	IECEx, ATEX, Brazil (Inmetro), Canada (CSA), Kazakhstan (GOST K), Russia (GOST R), Serbia (SRPS), USA (FM), Belarus (operating authorisation)
Ship approval	ABS, BV, ClassNK, DNV, GL, LR

### Safety data

Maximum values for	
Max. voltage $U_o / V_{oc}$	26.2 V
Max. current $I_o / I_{sc}$	80 mA
Max. power $P_o$	525 mW
Cable parameters (ATEX) (for inductive or capacitive circuits)	
Max. connectable capacitance $C_o / C_a$	
IIC	97 nF
IIB	0.75 $\mu$ F
Max. connectable inductance $L_o / L_a$	
IIC	3.2 mH
IIB	18.6 mH
Max. internal capacity $C_i$	0
Max. internal inductance $L_i$	0
Further information	see respective certificate and operating instructions

### Further parameters

Installation in	Zones 1 & 2, Div. 1 & 2, Zones 21 & 22
Further information	see respective certificate and operating instructions

### Technical Data

#### Electrical data

Ex-i / I.S. outputs	
Number of channels	8
Signal	
Signal range	0 ... 20 mA, 4 ... 20 mA (adjustable parameters for each channel)
Minimum signal	0 mA
Maximum signal	21.8 mA
Maximum load resistance	750 / 700 $\Omega$ at 20 mA / 21.8 mA
Resolution in the range	14 bit at 0 ... 21.8 mA
Maximum delay from internal bus to outputs	5 ms

# Analog Output Module Ex i / I.S. Outputs, 8 Channels for Zone 1


## Series 9465



### Technical Data

#### Electrical data

Galvanic separation	1500 V AC
between power supply and system components	
between two input / output modules	500 V AC
between outputs and system components	500 V AC
	The inputs and outputs of an I/O module have a common negative conductor.
Accuracy of measurement	
Note	All values in % of the signal span, at 23 °C / 73.4 °F
Measurement deviation	0.06 %
Ambient temperature influence	0.06 % / 10 K
Settings	
Open-circuit and short-circuit monitoring	ON, OFF (for each channel)
Diagnostics	
Retrievable parameters	Manufacturer, type, version, serial number
Module faults	<ul style="list-style-type: none"> <li>• Internal primary bus faults</li> <li>• Internal redundant bus faults</li> <li>• No response</li> <li>• Module does not correspond to configuration</li> <li>• Hardware fault</li> </ul>
Signal errors for each channel	
Open circuit	Output voltage > 16 V
Short circuit	Output load < 50 Ω
Operator interface	
Operation	LED green "RUN"
Fault	LED red "ERR"
Auxiliary power	
Maximum power consumption	5.9 W (8 channels at 20 mA)
Maximum power dissipation	4.3 W (8 channels at 20 mA and 500 Ω)
Electrical connection	
Ex i field signals	Plug-in terminals 16-pole with catch, 2.5 mm <sup>2</sup> / up to 14 AWG, screw or spring type
Connection diagram	

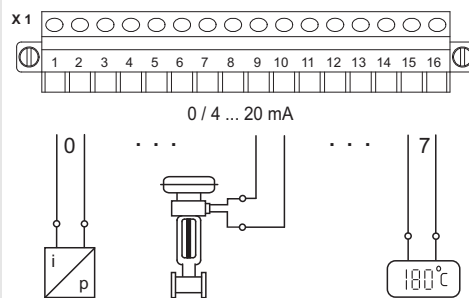

06305E00

#### Ambient conditions

Ambient temperature	-20 ... +65 °C / -4 ... +149 °F
Storage temperature	-40 ... +70 °C / -40 ... +158 °F
Maximum relative humidity	95 % (no condensation)
Sinusoidal vibration (IEC EN 60068-2-6)	1 g in frequency range between 10 ... 500 Hz 2 g in frequency range 45 ... 100 Hz
Semi-sinusoidal shock (IEC EN 60068-2-27)	15 g (3 shocks per axis and direction)
Electromagnetic compatibility	Tested according to the following standards and regulations: EN 61326-1 (1998) IEC 1000-4-1...6, NAMUR NE 21

#### Mechanical data

Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2

A4

# Analog Output Module Ex i / I.S. Outputs, 8 Channels for Zone 1

## Series 9465



### Technical Data







#### Mechanical data

Degree of protection (IEC 60529)	
Modules	IP30
Connections	IP20



#### Mounting / installation

Installation conditions	
Mounting type	on 35 mm DIN rail NS 35/15
Mounting orientation	horizontal and vertical

### Accessories and Spare Parts

Designation	Figure	Description	Art. no.
Plug-in terminal	 02079E00	2.5 mm <sup>2</sup> / 14 AWG with catch, 16-pole, screw connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Designation: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	162702
	 02077E00	2.5 mm <sup>2</sup> / 14 AWG with catch, 16-pole, spring connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits including test jacks Designation: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	162695
Labelling strips	 05869E00	"FB Addr ... Mod No ... " for pluggable terminal, sheet with 26 strips	162788
Designation strips	 05871E00	For BusRail, for 1 BusRail with 16 I/O modules	162793
Warning sign	 05872E00	"Clean modules only with a damp cloth."	162796
Partition	 02078E00	For assembly between intrinsically safe and non-intrinsically safe connectors of the I/O modules, in order to adhere to the required 50 mm / 2 in distance	162740

### Dimensional Drawings (All Dimensions in mm / inches) - Subject to Alterations

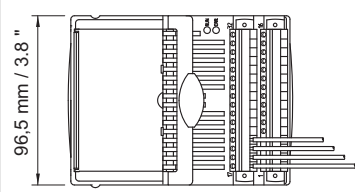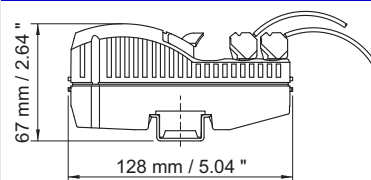

09879E00

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.