

FP-CA Flameproof Removable Cartridge Immersion Heaters

The range of FP-CA flameproof removable cartridge heaters offers a hazardous area heating solution for oil and similar applications where low heat density is required. The element can be withdrawn for inspection without system drain down. The standard heater consists of a single element or multiple cartridges fitted into a mounting flange. A robust Ex d terminal enclosure protects the electrical connections. The watts density of the element fitted depends upon the media to be heated and the kilowatt rating required.

The FP removable cartridge-type immersion heater range is certified for use in hazardous areas where the atmosphere is classified as a Zone 1 or 2 (IIA, IIB, IIC) gas group, or a Zone 21 or 22 (IIIA, IIIB, IIIC) dust group.



FEATURES

Certified to ATEX and IECEx standards

Mild steel or 316 stainless steel terminal enclosure with weatherproof protection to IP66 or Enclosure Type / NEMA 4 or 4X

Choice of built in process temperature sensors

Suitable for ambient temperatures from -60°C to +60°C (subject to certification parameters)

Mounting of the heater can be by a threaded NPT or BSP boss or an industry standard flange


Designed for horizontal installation (vertical mounting version available on request)

Can be supplied with the terminal box mounted away from the fixing boss / flange for high process temperatures

TYPICAL APPLICATIONS

| | |
|----------------------------|-----------------------------|
| Bitumen tanks | Oil purifiers |
| Boiler equipment | Oil separation / filtration |
| Cleaning and rinsing tanks | Oil separators |
| Compressors | Oil sumps |
| Crankcase lubrication | Pre-heating oil / water |
| Frost protection | Processing equipment |
| Heat transfer systems | Refrigeration packages |
| Lube oil reservoirs | Turbines |
| Water / glycol cooling | |

| Terminal Box Type | Min Flange Size | | kW LOAD with a maximum immersed Length of 2800mm | |
|-------------------|-----------------|-----|--|--------------------------------------|
| | Ins | mm | Max Cable Entries | Max No of Elements Without Stand Off |
| FP 4 | 3 | 75 | 1 off M25 & 1 off M20 | 6 |
| FP 6 | 6 | 150 | 1 off M32 & 2 off M25 | 15 |
| FP 8 | 8 | 200 | 2 off M25 & 1 off M40 | 33 |
| FP 10 | 10 | 250 | 1 off M50 & 2 off M25 | 54 |
| FP 12 | 12 | 300 | Up to 3 off M63 & 2 off M25 | 115 |

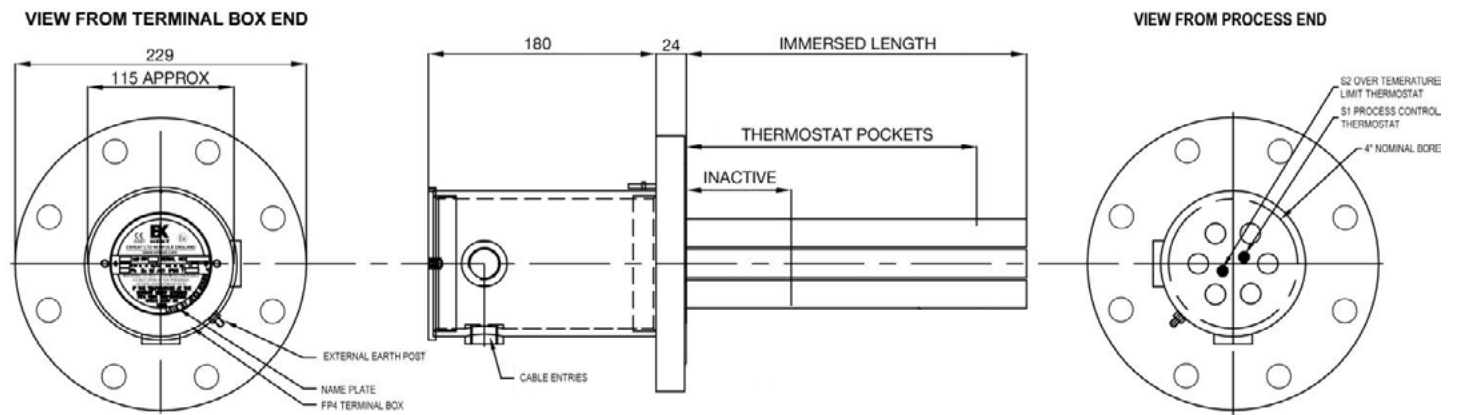

Certification

ATEX / IECEx Ex d IIC T1 to T6 Gb Zone 1 and 2
 ATEX / IECEx Ex tb IIIC T450°C to T85°C Db Zone 21 and 22 (IP66)
 CSA (CEC/NEC) Class I, Div 1, Groups A, B, C, D; T1 to T6, Enclosure Type / NEMA 4 or 4X
 CSA (CEC) Ex d IIC; T1 to T6 Gb, IP66 (Canada)
 CSA (NEC) Class I, Zone 1, AEx d IIC; T1 to T6 Gb, IP66 (USA)
 CU TR (formerly GOST), KGS, CNEEx, CCOE (CCEs), Inmetro

Enclosure

Mild steel or 316 stainless steel, external and internal earths, screwed terminal cover, finished in epoxy paint (if required)

Elements

Removable 304/316L stainless steel cartridge, comprising high quality 80/20 nickel chrome resistance wire, housed within 316L stainless steel sheath; cartridges secured by welding

Controls

Heater over-temperature protection is fitted as standard (optional process temperature sensing devices can be incorporated in the form of thermostats, RTD's or thermocouples)

Mounting

Any threaded boss or flange in any material can be specified within the limits of the design parameters; heater terminal box can be either 'direct-on' or 'stand-off', depending on process temperature

Rating

To suit process requirement within the design and certification parameters

Voltage

Any electrical supply up to 690V (600V CSA)