


# TRZ 2-STAGE CAPILLARY REGULATION THERMOSTAT

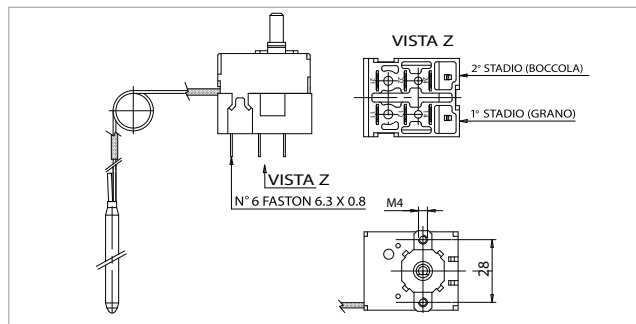

TRZ is a capillary thermostat with liquid expansion probe and 2-stage switch, unipolar, with switching contacts, particularly suitable for automatic temperature regulation for applications in civil and industrial heating, air conditioning and household appliances such as radiators electric, boilers, washing machines, dish-washers, etc.

Electrical contact capacity = 15 (2,5) A / 250 Vac  
 Switches = changeover  
 Max. head temperature = 80°C  
 Capillary length = 1500 mm PVC  
 Min. capillary curvature radius = 5 mm  
 Connection = via faston  
 Certifications = CE, ENEC03, EAC

Code	Article	Description	Pack.
544024	TRZ	2-stage thermostat: 1st stage 40/78°C, second stage 47/85°C	25

## ACCESSORIES FOR TR2 AND TRZ



Knobs are designed according to the need for regulation and the support dials.

Code	Article	Description	Pack.
556301	KNOB	Knob 0/90°C	20
556302	KNOB	Knob with an arrow	20
556303	KNOB	Knob 0/120°C	20
556313	KNOB	Knob 70/210°C	20
556326	KNOB	Knob 50/300°C	20
556343	KNOB	Knob 0/40°C	20
556360	KNOB	Knob -30/+30°C	20
556501	DIAL	Chrome dial	20
556503	DIAL	Black dial	20
556978	SPRING	Spring for knob	20
556979	STILL	Knob latch	20

Industrial components and thermal central