

Electronic Pressure Transducer

UPA2-DMP333-EX

Electronic pressure transducer for explosion-hazard environments, with internal stainless steel diaphragm, linearity error 0.35% f.s.

Features

Intrinsically safe II 1G Ex ia IIC T4 Ga
 Intrinsically safe II 1D Ex ia IIIC T85 °C Da
 Excellent long term stability, also with high dynamic pressure loads
 Insensitive to pressure peaks



Measuring ranges

0... 100 bar / 0...600 bar

Applications

Plant and machine engineering
 Mobile Hydraulics

Technical Data

Sensor element:	Piezoresistive silicon measuring cell				
Materials:	Wetted parts: Stainless steel, mat. no. 1.4404 Electronics housing: Stainless steel, mat. no. 1.4404 Seals: FKM, EPDM				
System of protection:	IP67 with PG / IP65 with plug				
Protection class:	III				
Process connection:	G1/4, G1/2 M DIN 3852				
Dimensions:	Ø26,5 x approx. 133 mm (with plug connector)				
Weight:	approx. 140 g				
Measuring ranges [bar]:	100	160	250	400	600
Overpressure [bar]:	210	600	1000	1000	1000
Linearity error:	$\leq \pm 0.35\%$ f. s., others on request				
Electrical connection:	Plug 4-pin, DIN EN 175 301-803-A (prev. DIN 43650)				


Temperature influence:	$\leq \pm 0.75\%$ f. s.
Compensation range:	0 ... +70 °C
Max. temperatures for environment:	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C
Output signals:	4...20 mA (2 wire)
Power supply:	10... 28 V DC, reversed polarity protection (SELV, PELV)
Safety technical max. values:	$U_i = 28 \text{ V}_{DC}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing
Delay:	$\leq 10 \text{ ms}$
Approval:	IBExU11ATEX1077 X EX: II 1G Ex ia IIC T4 Ga EX: II 1D Ex ia IIIC T85 °C Da $-20 \text{ }^{\circ}\text{C} \leq Ta \leq +70 \text{ }^{\circ}\text{C}$

Pressure

Electronic Pressure Transducer

UPA2-DMP333-EX

Dimensions (mm / inch)

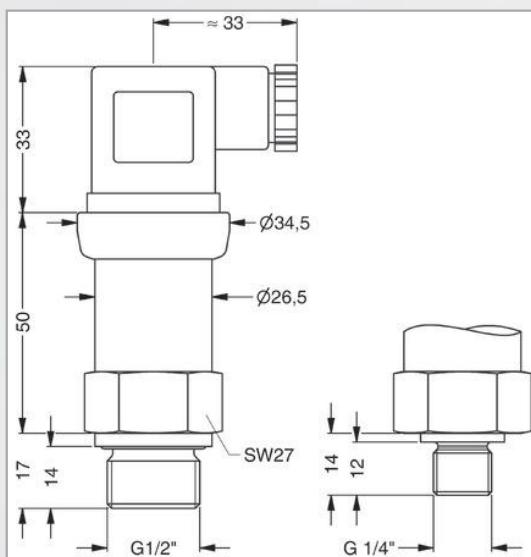

Electrical Connection

Connection	Current output 4-20 mA (2-wire)	
	Plug	Cable
+ Supply	1	white
- Supply	2	brown
Shield	ground pin	green/yellow

Order Code

UPA2-DMP333-EX						Base Model
100b						Range
160b						0...100 bar
250b						0...160 bar
400b						0...250 bar
600b						0...400 bar
	420					0...600 bar
		DIN				Output
		M12				4...20 mA/ 2-wires
						Electrical Connection
						Plug ISO 4400 (IP65)
						M12x1 4 pol. (IP67)
						Process Connection
			G1/2"			G1/2" DIN3852
			G1/4"			G1/4" DIN3852
						Sealing
			F			FKM
			E			EPDM
			B			NBR

Order code example:
UPA2-DMP333-EX / 100b / 420 / DIN / G1/4 / F